



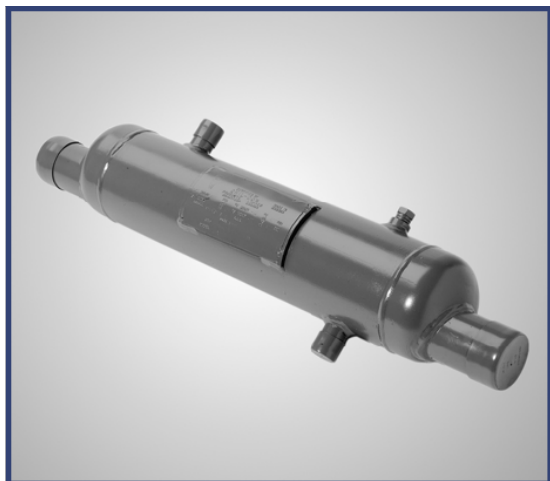

Specifications:

- **Liquid/Suction Heat Exchangers** are all rated at 400 P.S.I. working pressure
- **Henry Technologies Products** are certified by the National Board of Boiler and Pressure Vessel Inspectors. All vessels are designed and manufactured in accordance with Section VIII of the ASME Code and are available with U or UM code symbol stamps

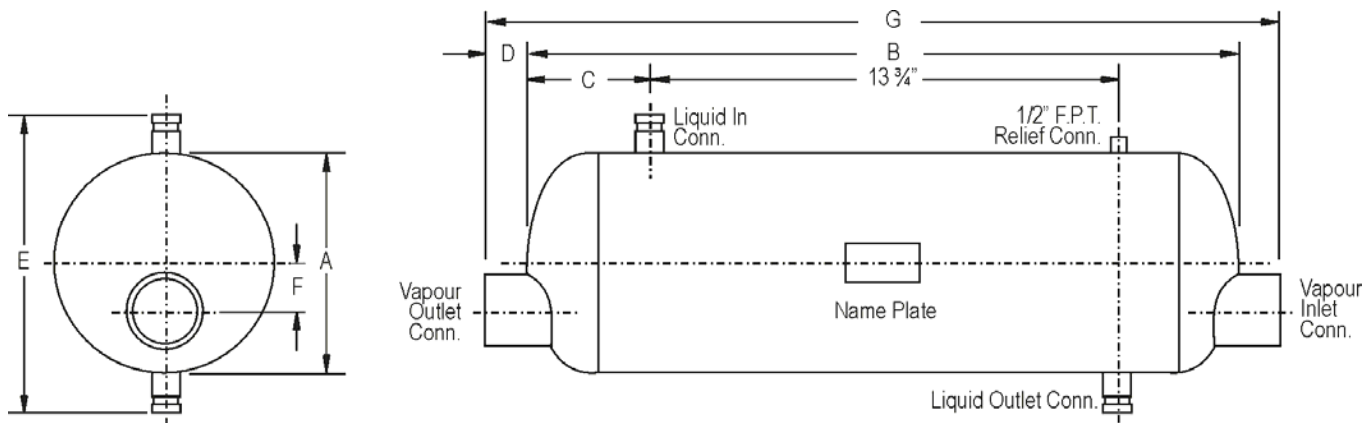

Catalog Number	Nom TR *	Max CFM	Dimensions in Inches							Vapor Conn.**	Liquid Conn.**	Ref. Charge Lbs.	Ship Wt. Lbs.
A	B	C	D	E	F	G							
LSX 14	3.7	14	3 1/2	21 3/4	4	2 1/2	7	3/4	26 3/4	1 1/8	5/8	5	21
LSX 18	4.7	18	3 1/2	21 3/4	4	2 1/2	7	1/2	26 3/4	1 3/8	5/8	5	22
LSX 22	5.8	22	3 1/2	21 3/4	4	2 1/4	7	1/2	26 1/4	1 5/8	5/8	5	23
LSX 31	8.2	31	4 1/2	22	4 1/8	2 1/2	8 3/8	1/2	27	2 1/8	7/8	8	29
LSX 45	11.8	45	4 1/2	22	4 1/8	2 1/2	8 3/8	1/2	27	2 1/8	7/8	8	31
LSX 65	17.1	65	5 9/16	22 1/2	4 3/8	3	9 1/4	1	28 1/2	2 5/8	1 1/8	12	43
LSX 90	23.7	90	5 9/16	22 1/2	4 3/8	3	9 1/4	1	28 1/2	2 5/8	1 1/8	12	46
LSX 135	35.5	135	6 5/8	25 1/2	5 7/8	3	10	1	31 1/2	3 1/8	1 3/8	17	61
LSX 220	57.9	220	8 5/8	24 1/2	5 3/8	2 3/4	12 3/8	1 1/2	30	3 5/8	1 5/8	30	88
LSX 340	89.5	340	10 3/4	26	6 1/8	6	16	2 1/4	38	4	2 1/8	40	128
LSX 450	118	450	10 3/4	26	6 1/8	6	16	2 1/4	38	4	2 1/8	40	139
LSX 500	132	500	12 3/4	26 1/2	6 3/8	6	17 3/4	2 1/2	38 1/2	5	2 1/8	61	175
LSX 660	174	660	14	28	7 1/8	6	18 1/2	3	40	5	2 1/8	70	251

* Nominal T.R. based on R22 @ 32°F. evap. temperature, 40°F. entering gas temperature, 100°F. liquid entering temperature. LSX unit will provide 20°F. leaving gas superheat and 12°F liquid subcooling.

** Connections are ODF except 4" and 5" which are steel weld stubs.

Custom units available upon request.

